

Product Data Sheet

HKL HT 65/35

Loose



PRODUCT INFORMATION


Duraflex™ High Tensile Hook End Steel Fiber

65/35 is a steel fiber cold-drawn wire for reinforced concrete. Duraflex™ HT 65/35 is designed in order to avoid balling issues, and to improve the durability of the concrete.

Duraflex™ HT 65/35 can replace all conventional reinforcing methods for concrete or can be used in combination with them.

HKG HT 65/35

Glued



TECHNICAL INFORMATION



Material	Low Carbon Drawn Wire
Aspect Ratio	65
Length	35 mm
Diameter	0.55 mm
Tensile Strength	>1300MPa High Tensile Steel Fiber

APPLICATIONS




- Tunnel Shotcrete
- Precast
- Elements
- Road and Pavement

KEY BENEFITS



- Increases load-bearing capacity.
- Control shrinkage cracks.
- Improve durability.
- Reinforce the concrete multi-directionally.
- Reduce construction time.

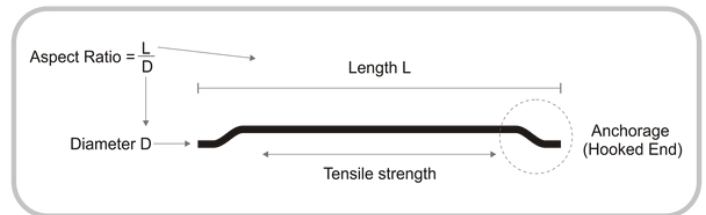

Appearance Clear, Bright Loose/Glued Fibers with Hook End anchorage

Conforms to EN 14889-1, ASTM A820 MO4 Standards



PACKING



Available in 20kg and 25kg bags



STORAGE



Store in a dry area.



SAFETY



We recommend that gloves and eye protection be used when handling fibre.

Head Office

KASTURI METAL COMPOSITE PVT LTD
Registered Office: A-30/3 ,MIDC
Amravati, Maharashtra, India
Pin : 444605

Mumbai Office

Office no 171, Satara Plaza, Palm
Beach Rd, Phase 2, Sector 19D,
Vashi, Navi Mumbai, Maharashtra,
India 400705