

Product Data Sheet

HKL HT 65/35

Loose




PRODUCT INFORMATION

Duraflex High Tensile Hook End Steel Fiber
65/35 is a steel fiber cold-drawn wire for reinforced concrete. Duraflex HT 65/35 is designed in order to avoid balling issues, and to improve the durability of the concrete. Duraflex HT 65/35 can replace all conventional reinforcing methods for concrete or can be used in combination with them.

HKG HT 65/35


Glued



TECHNICAL INFORMATION



Material	Low Carbon Drawn Wire
Aspect Ratio	65
Length	35 mm
Diameter	0.55 mm
Tensile Strength	>1100MPa High Tensile Steel Fiber

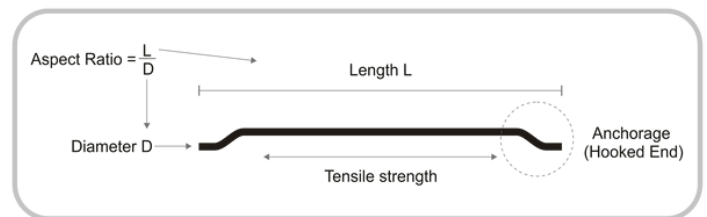

Appearance	Clear, Bright Loose/Glued Fibers with Hook End anchorage
Conforms to	EN 14889-1, ASTM A820 MO4 Standards

APPLICATIONS



- Tunnel Shotcrete
- Precast
- Elements
- Road and Pavement

KEY BENEFITS



- Increases load-bearing capacity.
- Control shrinkage cracks.
- Improve durability.
- Reinforce the concrete multi-directionally.
- Reduce construction time.

PACKING



Available in 20kg and 25kg bags

STORAGE



Store in a dry area.

SAFETY



We recommend that gloves and eye protection be used when handling fibre.

